



## DF 801-RM Analogue Addressable Relay Module

---

### Description

DF 801-RM Relay Module facilitates third party devices to interface with Detect Fire make addressable panel. Relay Modules are the remote devices to activate potential free contacts. The RED blinking LED indicates normal operating conditions and the steady state LED for activated conditions DIP switches are provided for addressing of the module. The Monitor circuit is supervised for faulty condition.

### Special Features

- Detect Fire is American Company with high quality product
- UL-Listed (9th Edition).
- Modular Construction.

### Features

- Module Status by RED LED.
- Analogue Communication with the panel.
- Module Addressing by 8 way DIP switches.
- Low Standby Current.
- Available with suitable back boxes.



### Electrical specification:

Operating Voltage	: 24 VDC Nominal.
Current Draw	: 2 mA Max.(Latched)
Contact Rating	: 2A @ 30VDC(Resistive)
Temperature range	: 0oC to 49oC./ 32o- 120oF
Humidity	: 93 ± 2% RH (non-condensing) at 32 ±2'



### Mechanical Specification:

Dimensions	: (95 W X 75 H X 24D) mm
Color	: Black
Weight	: 0.35 Kg






## DF 801-RM Analogue Addressable Relay Module

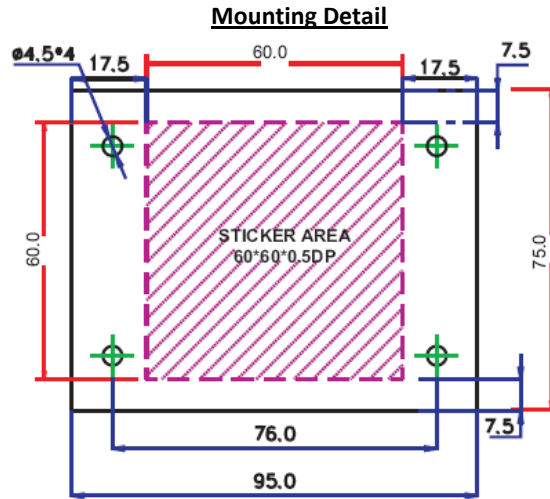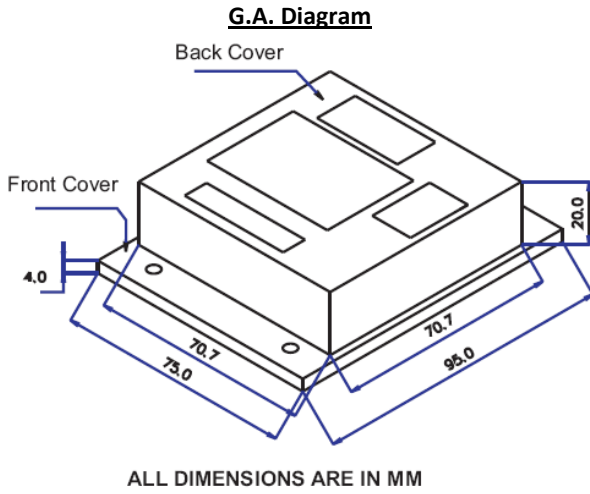

### Wiring Diagram

Use only Listed  
Compatible Panel

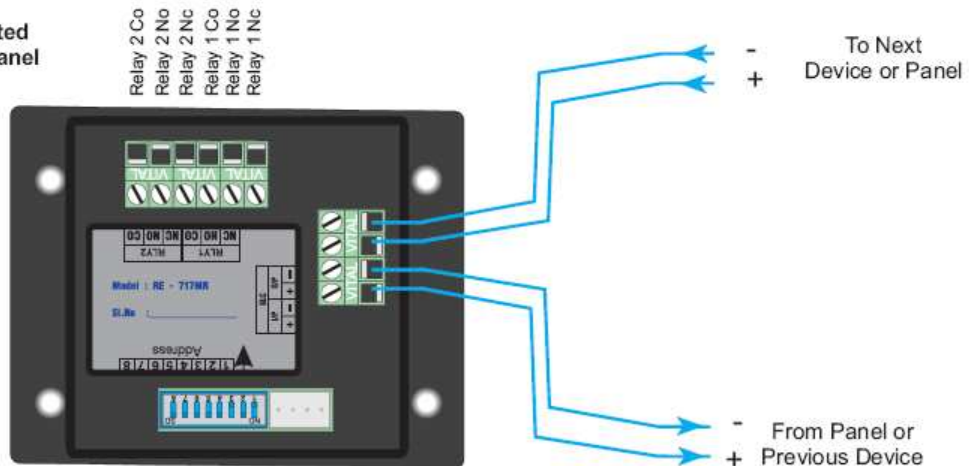

### NOTE:

- \* ALL WIRING SHOWN IS SUPERVISED AND POWER LIMITED
- \* RELAY OUTPUT ARE NOT SUPERVISED

### Ordering Information:

Model	Description
DF 801-RM	Analogue Addressable Relay Module

